


### Duel Post Ground Mount Specifications - Portrait

<http://www.tripplehydro-energy.co.za>

[info@tripplegroup.co.za](mailto:info@tripplegroup.co.za)

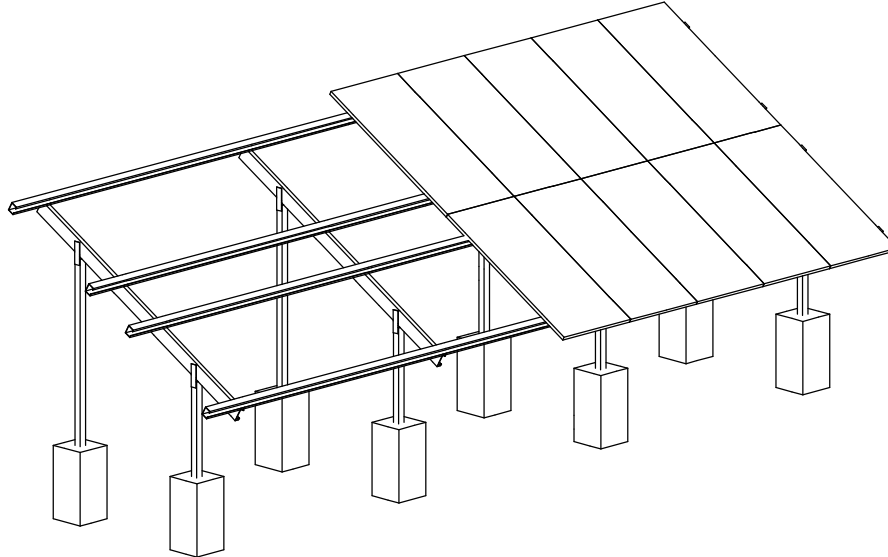

#### TABLE SPECIFICATIONS

Number of Panels	8	10	12	14	16	18	20	24	32
Table Size 240-265W Panel	3280x4052	3280x5065	3280x6078	3280x7091	3280x8104	3280x9117	3280x10130	3280x12156	3280x16208
Table Size 300-330W Panel	3908x4052	3908x5065	3908x6078	3908x7091	3908x8104	3908x9117	3908x10130	3908x12156	3908x16208
Table Weight	151kg	168kg	226kg	244kg	430kg	318kg	336kg	411kg	521kg
X-X Post Spacing	3400	3400	2670	3200	2500	2800	3200	2900	3100
Z-Z Post Spacing	1750								
Number of Posts	2	2	3	3	4	4	4	5	6
Ground Clearance	700 mm Ground to bottom of tilt arm								
GENERAL SPECIFICATIONS									
Max Windload rating	Max. Calculated wind resistance of 40m/s								
Tilta Angle from Horizontal	30°								
Excavation (footings)	350 x 350 x 750 mm								
Concrete/post	0.092m <sup>3</sup>								
Post Material	76 x 76 x 2mm Square Tube, hot dipped galvanized to 80micron								
Brace Material	150 x 50 x 20 x 2.5mm Electro-galvanized Lipped Channel								
Horizontal Rail Material	100 x 50 x 20 x 2.5mm Electro-galvanized Lipped Channel								
Hardware (fasteners)	Aluminium contacting bolts of 304 Stainless Steel, all other electro-plated galvanized bolt, washers and nuts								

**COPYRIGHT NOTICE:**

THIS DRAWING IS SUBJECT TO COPYRIGHT AND MAY NOT BE REPRODUCED, IN WHOLE OR PART, OR IN ANY MANNER WHATSOEVER WITHOUT WRITTEN PERMISSION